



SMARTDRUM SERIES

200 L Drum Unloaders with the Highest Melting Capacity

SmartDrum Series Unloaders have been designed to achieve the highest melting rates in the industry when working with any type of adhesive delivered in 200-liter drums, even with acrylic adhesives.

Features:

- Main machine communication protocols Modbus TCP and Ethernet. Profinet, Profibus and Ethernet IP protocols available as an option.
- SmartDrum Unloaders allow users to connect to the control panel screen through a VNC server.
- All electronics are commercially available components. No proprietary elements.
- Up to 6 high-power hose/gun connections (10A). Additionally, SmartDrum unloaders feature our SmartNet connection, allowing to connect up to 3 Smartdrive boxes to control 3 pumping stations, 2 SmartFlow boxes and 2 SmartHeat boxes for up to 6 additional hose/gun connections each or up to 12 additional coating head heating zones.



The highest melting rates. A specially designed high-capacity finned platen achieves the highest melting rates known to the industry, even when working with acrylic adhesives.


All platens are Teflon® coated and include cast-in heaters.



Optional Safety Features include a vent hood for easy connection with ventilation tube, as well as a platen protection system to shield operators from entrapments.


Faster drum changes.

A new drum fastening system facilitates drum changes, ensuring the new drum will always be accurately placed in the correct working position.



Optional drum clamp allows working with adhesives delivered in fiber drums.

Tandem Mode. Working in tandem eliminates downtime associated with drum changes. SmartDrum Series can work in tandem by simply connecting the two unloaders with an Ethernet cable. No additional equipment or accessories needed.

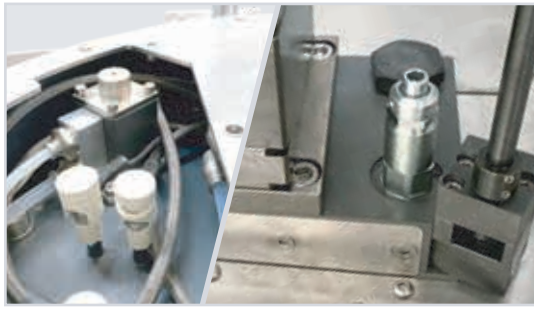

Automatic blow-off valve included

A built-in pressure relief valve adjusts the adhesive output pressure. A pneumatic pressure relief valve is available as an option.




Intuitive touchscreen panel. Working parameters, as well as adhesive consumption data (grams per square meter or grams per product) can easily be checked and configured from the screen.

Technical Specifications

Characteristics	SmartDrum Series
System	200L high-capacity, finned platen
Drum Capacity	200 L
Max. Melting Capacity	240 Kg/h (*)
Max. Pumping Rate	240 Kg/h
Working Temperature	30 - 230 °C
Max. Working Viscosity	90,000 cps
Max. Working Pressure	80 bar
Electrical Consumption	23 Kw
Dimensions	Platen up: 1655mm W x 716mm D X 2402mm H Platen down: 1655mm W x 716mm D x 1446mm H

(*) Melt rate may vary depending on specific adhesive type and working conditions

Max. Channel Power	Ni120	PT100
Hose / Gun	2300W	2300W

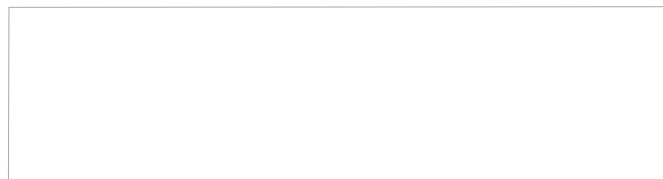

For more information, visit valcomelton.com or contact your local Valco Melton representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612

Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584

Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834

inquiry@valcomelton.com • Serving over 76 Countries Worldwide • valcomelton.com